

MAKE IN INDIA - MAKING INDIA SECURE



INFORMER

8 Input Zones GSM Communicator - Android App-



1 Trigger



Mobile Call Alert



Arming / Disarming through SMS



Control through Android App



Store 4 Phone Numbers



EMERGENCY Switch

Features


- Eight Input Zones
- Each Input Can Be Assigned To A Separate User
- Emergency Alert Switch.
- 8 Individual Sms Alert For Each Zone.
- Built-In Gsm Communicator
- Stores 4 Users & 1 Admin Contact No.
- Sms and/or Calls To 5 Authorized Users
- Editable 15 Bit Sms Alert Message
- Zone - Open, Close Or Both Instant Alert
- 2 Ways Of Control: Sms, Android Apps
- Event Log Info At User Android Mobile Apps.
- Led Indicators For Network Signal & Status.
- Zone Arm/Disarm Through Sms/Android Apps.
- Compact Design

Eight Inputs
Communicator



INFORMER

8 Input Zones GSM Communicator - Android App

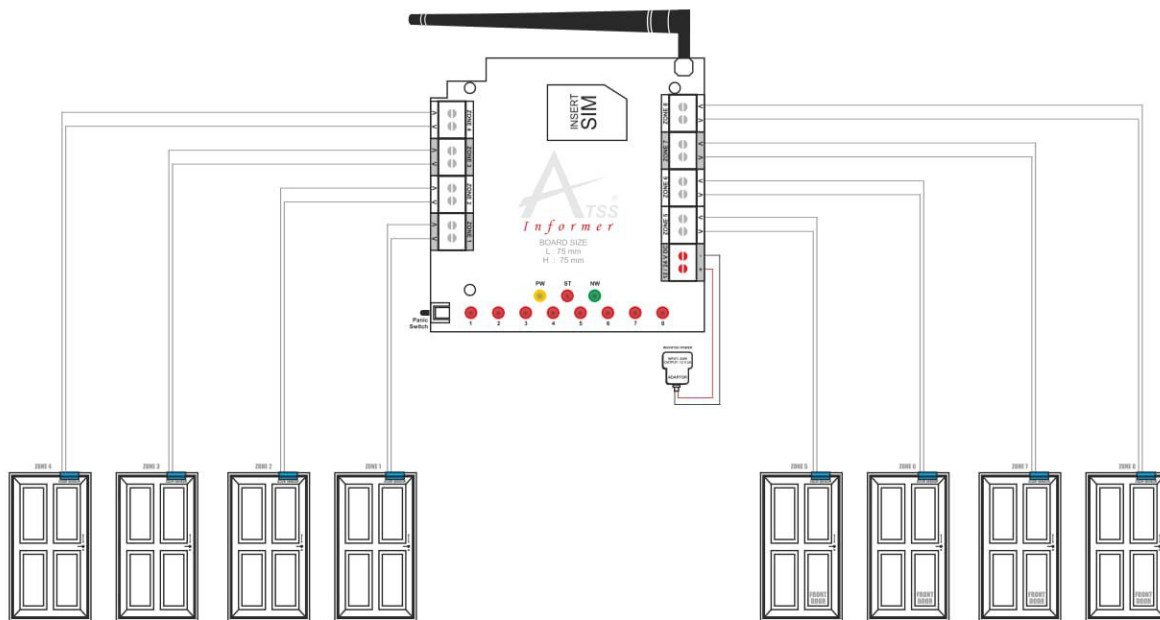

SPECIFICATION

POWER SUPPLY	
Max Power Consumption	24 watts
Supply Voltage	12-24 V
Total current Rating	2 amp (max)
ZONES	
Zone Response Time	< 500 Millisecond
Zone Loop Resistance	< 5 kilo Ohm For Normally Closed
Max Length of Sensor Cable (multi core cable)	150 m (Depends on cable resistance)
GSM Antenna	3 db
ENVIRONMENTAL	
Environment	Residential/ Commercial/ Light Industrial
Max Humidity	95% Non-Condensing
Operating Temperature	0°C To 45°C
Storage Temperature	-20°C~+ 60°C
PHYSICAL	
Colour	RED, BLACK
Control Panel Dimensions(mm)	(H X W X L) = 115 X 25 X 110
Weight	125 g